



- Pulverizing room: This super-micro hammer mill uses a very fast pulverizing design.
- Rotation rate: 3500 rpm.
- Rotation diameter of hammer cutter: 660 mm
- No. of Cutter: 84.
- Screen dimensions: 670mm(W)x965mm(L).
- 粉碎室：採用極速錘碎設計
- 轉速：3500RPM
- 錘刀直徑：660MM
- 錘刀數：84支
- 網板尺寸：670mm(W)x965mm(L).



Bump plate: Locked up by bolts and is changeable.  
 衝擊板及錘刀，衝擊板由專門和衝擊板鎖接組合而成，可替換。

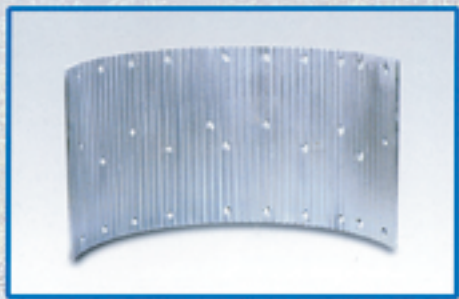

Hammer cutter: Forging into one piece.  
 一體成型錘刀

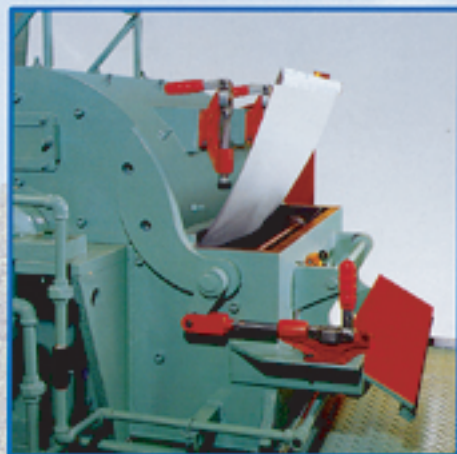

Rapid screen changer: Rapid and simple screen changing for the screen and need not to open its casing.

快速換網：簡易換網設計，換網容易，確實且不用打開機蓋快速完成。



Circulating machine oil cooling system: The bearing uses chilling machine oil and circulation method for lubrication, thus it can lower down the temperature of the bearing to assure the utility life of the bearing and smooth operation.

循環機油潤滑法：循環給油以保證在運轉溫度下能為軸承提供足夠的潤滑，在高速運轉下，循環機油潤滑法使機油循環，在流回軸承之前冷卻，使軸承運行溫度保持在較低水平運轉，確保軸承壽命。